

# 橡胶软电缆

(天然和合成橡胶)



## WCT (85v) 60°C – 弧焊电极电缆

(天然橡胶电缆)


包括应用于二次使用弧焊电缆  
(无负载电压低于85v.)

特征:

1. 用于连结
2. 护套使用天然橡胶
3. 裸铜线 (A)

规格:

日本产业标准  
JIS C 3404 (焊接用电缆).

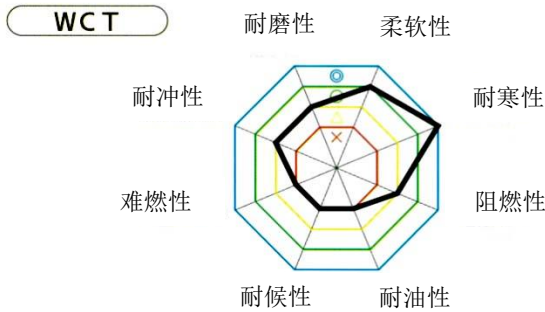

### WIRE SIZE AND AMPERE RATINGS:

尺寸 (mm <sup>2</sup> )	AWG (美国规格)	可承受电流 占比		
		100%	80%	50%
14	6	88	98	124
22	4	121	135	171
30	2	147	164	207
38	1	171	191	241
50	1/0	199	222	281
60	2/0	225	251	318
80	3/0	280	313	395
100	4/0	317	354	448
125	250	371	414	524
150	300	409	457	578

