

## E-WCT(R) Welding robot cable

Size : **80mm<sup>2</sup>**

RoHS2



### Characteristics:

As a welding power cable for spot welding/arc welding robots, It can also be used on the secondary side (base material side, hand side) of a hand stick arc welder. The sheath uses flame-resistant cross-linked polyethylene with excellent flame resistance (spatter resistance), weather and heat resistance.


Rated temperature: 90°C, conductor uses bare annealed copper wire (A).

### Application:

Welding robot

Machine manufacturing

Shipbuilding

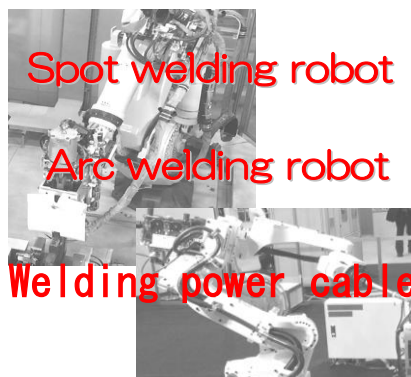

#### Location

If you have any questions or requests, please contact us.



**MITSUBOSHI CO., LTD Electric wire**

<b>Osaka Branch</b>	TEL 06-6261-8884	FAX 06-6261-5550
<b>Tokyo Branch</b>	TEL 03-6897-8660	FAX 03-6897-8665
<b>Kyushu Sales Office</b>	TEL 092-526-2615	FAX 092-526-2781
<b>Nagoya Sales Office</b>	TEL 052-760-4636	FAX 052-760-4637
<b>Shiga Factory</b>	TEL 0748-86-6104	FAX 0748-86-2103

URL : <http://www.kk-mitsuboshi.co.jp/>

Email: [kaigai@kk-mitsuboshi.co.jp](mailto:kaigai@kk-mitsuboshi.co.jp)