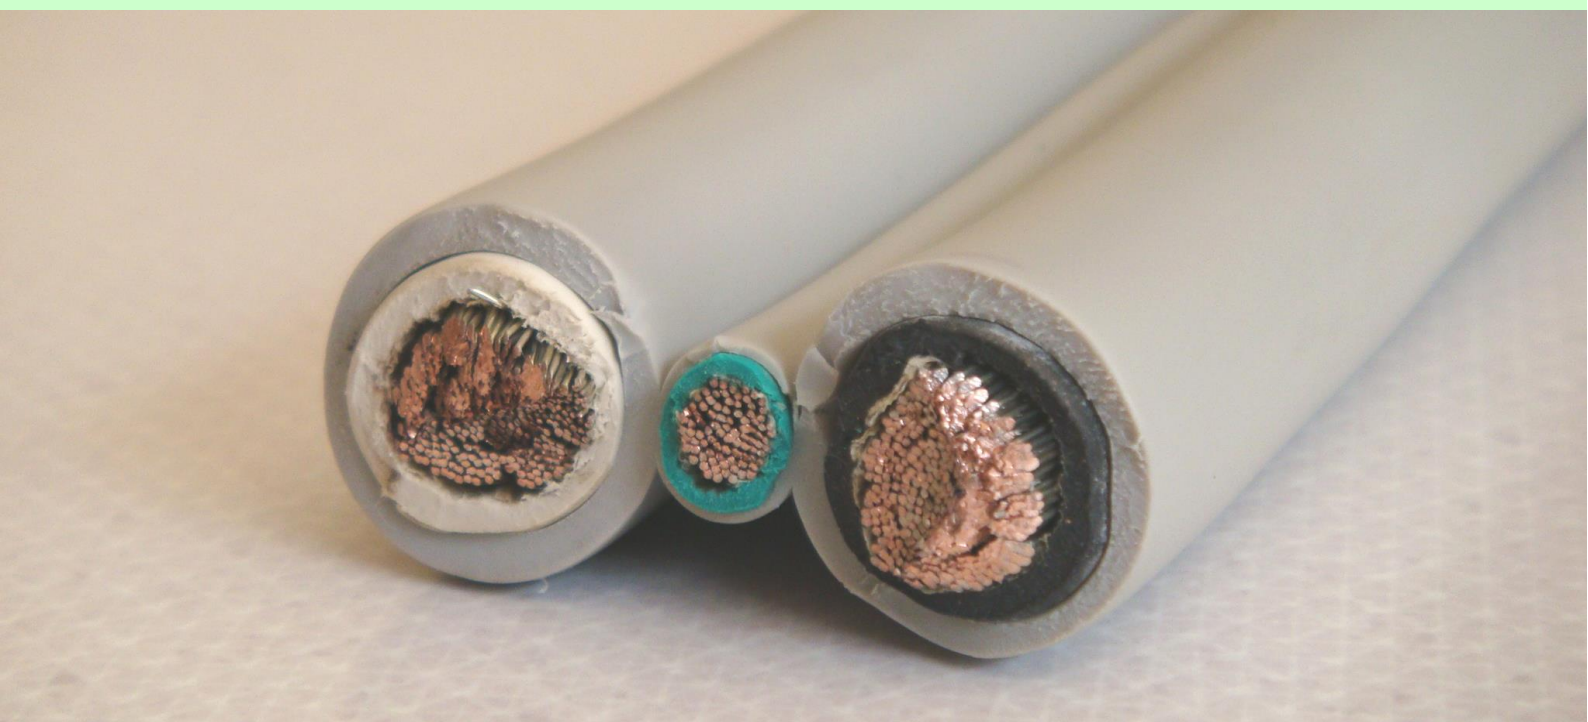

GF-MCT/E

600V

RoHS2

*Welder cable for factory environment improvement
(beautification)*

Usage method: Welder primary power line



MITSUBOSHI CO., LTD

Certificate bases: J I S C 3 0 0 5 "Rubber/Plastic insulated wire test method"
 J I S C 3 3 1 2 "600V Vinyl Insulated Vinyl Cabtyre Cable"
 Electrical equipment technical standards

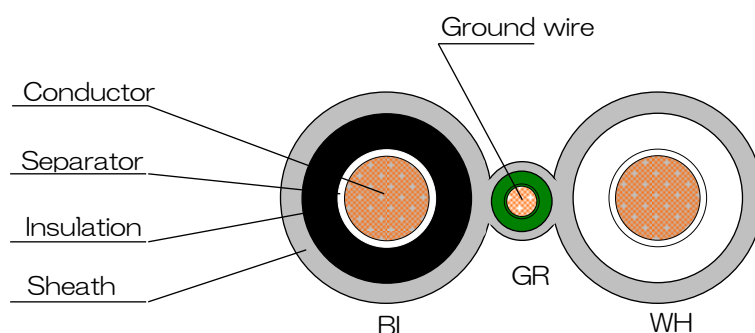
Voltage : AC 600V

Test Voltage : 3000V/1 min

- Characteristics :**
- ① Uses ethylene propylene rubber for the insulator and oil-resistant heat-resistant soft vinyl chloride for the sheath.
 - ② The cable and ground wire are integrated, improving workability
 - ③ By setting the color of the exterior sheath to light gray, dirt becomes more noticeable and leads to an improvement in the factory environment.
 - ④ Although it is not a spatter-resistant material, it has no problem with slight spattering according to our research.

Application : Primary power line for spot welders

Construction



GF-MCT/E	Size	Conductor	Minor axis x major axis (mm)	Weight (kg/km)
2×38+1×55E	38	(TA)7/34/0.45	16.9×41.0	1200
	5.5	(TA)70/0.32		
2×60+1×55E	60	(TA)19/20/0.45	21.0×48.0	1800
	5.5	(TA)70/0.32		

Location	
<p>If you have any questions or requests, please contact us.</p>	<div style="text-align: center;">  <p>MITSUBOSHI CO., LTD ELECTRIC WIRE</p> </div> <p>Osaka Branch TEL 06-6261-8884(代) FAX 06-6261-5550</p> <p>Tokyo Branch TEL 03-6897-8660(代) FAX 03-6897-8665</p> <p>Kyushu Sales Office TEL 092-526-2615(代) FAX 092-526-2781</p> <p>Nagoya Sales Office TEL 052-760-4636(代) FAX 052-760-4637</p> <p>Shiga Factory TEL 0748-86-6104(代) FAX 0748-86-2103</p> <p style="text-align: center;">URL : http://www.kk-mitsuboshi.co.jp/</p>